



## Additel 901

### Low Pressure Test Pump

- Generate 6 psi (0.4 bar) vacuum to 6 psi (0.4 bar) pressure
- Portable, only 3.5 lb
- Great stability and high resolution
- Minimal maintenance
- Hand-tight quick connectors



#### OVERVIEW

The 901 Low Pressure Test Pump is a hand operated pressure pump designed to generate pressures from -6 psi (-0.4 bar) to 6 psi (0.4 bar). A high-quality screw press is designed for fine pressure adjustment, with an adjustment resolution up to 0.1 Pa (0.001 mbar). The 901 is a very stable low pressure calibrator. It makes use of an isothermal bellows chamber which is designed for reducing the possible effects of environmental temperature change. Most pumps make use of a check valve (non-returning valve) and are not well insulated which will cause large fluctuations in pressure with a change in ambient temperature or when the unit is touched. The 901 does not use a check valve and is remarkably stable. Two hand-tight connectors installed on the pump allow easy connecting and disconnecting to the test pump without the need for PTFE tape or wrenches. The 901 is an ideal comparison test pump for low pressure applications.

#### FEATURES


- **Portable:** Only 3.5 lb
- **Adjustment Resolution**  
0.1Pa (0.001 mbar); Specially designed screw press for fine pressure adjustment.
- **Great Stability**  
Isothermal chamber: the pressure chamber is insulated to reduce the influence from environmental temperature changes.  
Specially designed bellows minimize leakage to guarantee excellent stability.
- **Durable and Minimal Maintenance**  
Without non-returning valve that is usually used on troublesome hand pump.
- **Easy-to-use**  
Pressure could be set and adjusted precisely and quickly through a simple turn of the handle.
- **Hand-tight Quick Connectors**  
Allows easy connecting and disconnecting to the test pump without the need for PTFE tape or wrenches.

#### SPECIFICATIONS

- **Media:** Air.
- **Generated Pressure Range**  
6 psi (0.4 bar) vacuum to 6 psi (0.4 bar) positive pressure.
- **Adjustment Resolution:** 0.1 Pa (0.001 mbar).
- **Material:**  
Ram/adapters: SST  
Body: SST/aluminum  
Seals: Buna-N
- **Connection**  
Hand-tight connectors for both test gauge and reference gauge. Test Gauge Connection: 1/4NPT female, 1/4BSP female, or M20X1.5 female  
Reference Gauge Connection: 1/4NPT female, 1/4BSP female, or M20X1.5 female
- **Dimensions:** Height: 5.7" (145mm)  
Base: 9.65" (245 mm) x 6.50" (165mm)
- **Weight:** 3.5 lb (1.6 kg).
- **Warranty:** 1 year.

#### ORDERING INFORMATION

##### Model Number

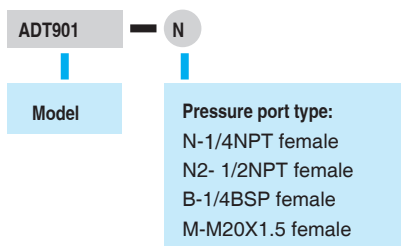

##### Accessories included

- O-ring: 20 pcs
- Manual: 1 pc

##### Optional Accessories

Model numberel	Description
ADT901-kit	Test kit for ADT901 (hose barb fitting, hose, etc)
ADT901-HD	Holder for Additel 681 differential gauge or 672 differential calibrator.
ADT102	Adapters and fittings, 1/4NPT male to various male and female connection (26 pcs). More information shown on page 45.
ADT103	Adapters and fittings, 1/4NPT (1/4BSP, or M20X1.5) male to various female hand-tight quick connectors (10 pcs). More information shown on page 46.
ADT100-HTK	Hose test kit, 5 feet flexible hose, 8000 psi, 1/4NPT male to 1/4NPT (1/8NPT, 1/2NPT, 1/4BSP, or M20X1.5) female hand-tight quick connector. More information shown on page 47.
9901-901	Carrying Case for one ADT901 pump and two ADT681 gauges or ADT672 calibrators



## Additel 912 Low Pressure Test Pump

- **Generate 95% vacuum to 60 psi (4 bar) pressure**
- **Portable**
- **Great stability and high resolution**
- **Minimal maintenance**
- **Hand-tight quick connectors**



### OVERVIEW

The 912 Pneumatic Pressure Test Pump is a hand operated pressure pump designed to generate pressure from 95% vacuum to 60psi (4bar). A high-quality screw press is designed for fine pressure adjustment, with an adjustment resolution up to 0.1 Pa (0.001 mbar). The 912 is a very stable low pressure calibrator. It makes use of an isothermal bellows chamber which is designed for reducing the possible effects of environmental temperature change. Most pumps make use of a check valve (non-returning valve) and are not well insulated which will cause large fluctuations in pressure with a change in ambient temperature or when the unit is touched. The 912 does not use a check valve and is remarkably stable. Two hand-tight connectors installed on the pump allow easy connecting and disconnecting to the test pump without the need for PTFE tape or wrenches. The 912 is an ideal comparison test pump for low pressure application.

### FEATURES


- **Portable:** Only 6.2 lb
- **Adjustment Resolution**  
0.1Pa (0.001 mbar)  
High-quality screw press for fine pressure adjustment
- **Great Stability**  
Isothermal chamber: the pressure chamber is insulated to reduce the influence from environmental temperature changes  
Specially designed bellows minimize leakage to guarantee excellent stability  
Shut-off valve closes the air in the isothermal chamber during calibration
- **Durable and Minimal Maintenance**  
Built-in gas-liquid isolator protects the pump from moisture and dirt
- **Easy-to-use**
- **Hand-tight Quick Connectors**  
Allows easy connecting and disconnecting to the test pump without the need for PTFE tape or wrenches

### SPECIFICATIONS

- **Media:** Air.
- **Generated Pressure Range**  
95% vacuum to 60 psi (4bar) positive pressure
- **Adjustment Resolution**  
0.1 Pa (0.001 mbar).
- **Material:** Ram/adapters: SST  
Body: SST/aluminum  
Seals: Buna-N
- **Connection**  
Hand-tight connectors for both test gauge and reference gauge.  
Test Gauge connection: 1/4NPT female, 1/4BSP female, or M20X1.5 female  
Reference Gauge Connection: 1/4NPT female, 1/4BSP female, or M20X1.5 female
- **Dimensions**  
Height: 5.51" (140 mm)  
Base: 10.75" (273 mm) x 10.16" (258 mm)
- **Weight:** 6.2 lb (2.8 kg).
- **Warranty:** 1 year

### ORDERING INFORMATION

#### Model Number

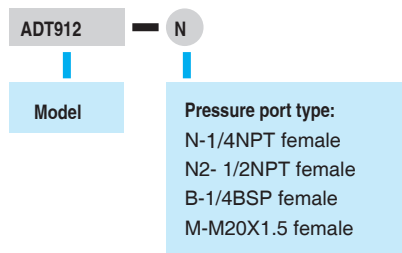

#### Accessories included

- O-ring: 20 pcs
- Manual: 1 pc

#### Optional Accessories

Model numberel	Description
ADT912-kit	Test kit for 912 (hose barb fitting, hose, etc)
ADT102	Adapters and fittings, 1/4NPT male to various male and female connection (26 pcs). More information shown on page 45.
ADT103	Adapters and fittings, 1/4NPT (1/4BSP, or M20X1.5) male to various female hand-tight quick connectors (10 pcs). More information shown on page 46.
ADT100-HTK	Hose test kit, 5 feet flexible hose, 8000 psi, 1/4NPT male to 1/4NPT (1/8NPT, 1/2NPT, 1/4BSP, or M20X1.5) female hand-tight quick connector. More information shown on page 47.
9904-912	Carrying Case for one 912 pump and two 681 gauges or 672 calibrators.